



ELASTECH Products Inc.

5915 Atlantic Dr., Unit 2, Mississauga, Ontario, Canada L4W 1S4
phone (416) 670-2521 fax (416) 670-2599

09 662
09 730



POLYURETHANE PRODUCTS

Champ-Floor

Your Partner
For Sport & Play

Existing Carpet Sub-base



Specification Sheet #CF-C

Champ-Floor Polyurethane
lacquer finish

Champ-Floor FPU


Champ-Floor seal coat

Existing synthetic carpet and pad
glued to base

Existing concrete or wood base

Vapour barrier

Granular base

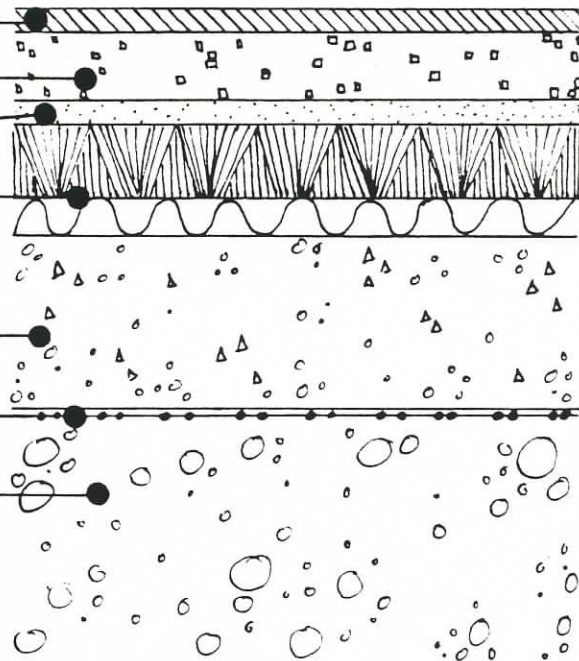

NTS

Note: It is important that the base - carpet - is cleaned to its original condition. The surface must be smooth and have a moisture content of less than 5%. Minor deviations in the level of the surface can be filled with the Champ-Floor material. Major deviations must be filled with the same material as the base.

© 1988 rmz Elastech Products Inc.

a completely integrated system

1. The carpet must be a synthetic and be thoroughly cleaned prior to the installation. The carpet may be worn, but cannot have any holes. The carpet backing must be inert and show no signs of deterioration
2. A seal coat of Champ-Floor FPU is applied over the entire carpet surface.
3. The Champ-Floor FPU surface is applied to the desired thickness.
4. The Champ-Floor FPU is sanded to remove any imperfections.
5. The coloured wear lacquer is placed over the Champ-Floor FPU.
6. Line marking is applied with a two-component polyurethane paint.

CAUTION: The wear lacquer contains flammable solvents. All precautions of no sparks, open flames or smoking are to be strictly adhered to during and 10 hours after application.