



ELASTECH products inc.

5915 Atlantic Dr., Unit 2, Mississauga, Ontario, Canada L4W 1S4
phone (416) 670-2521 fax (416) 670-2599

02 530
02 540
02 542



POLYURETHANE PRODUCTS

TORO-TAN

EverPlay

U.S. Patent #4,492,728



Specification Sheet #EP

Optional Polyurethane spray

EverPlay layer 30mm (1.2")

Wire Mesh (10 x 10 x 10/10)


Geotextile filter cloth

Fine crushed granular levelling layer,
depth is determined by the final grade
Compact to 95% Proctor

Loosen the existing surface to a depth
of 100mm (4"). Must have a water
percolation rate of 60 liters/M2/hour
or 1.5 US gallons/ft2/hour.
Compact to 95% Proctor

French drain
perforated pipe (optional)

Undisturbed sub-soil

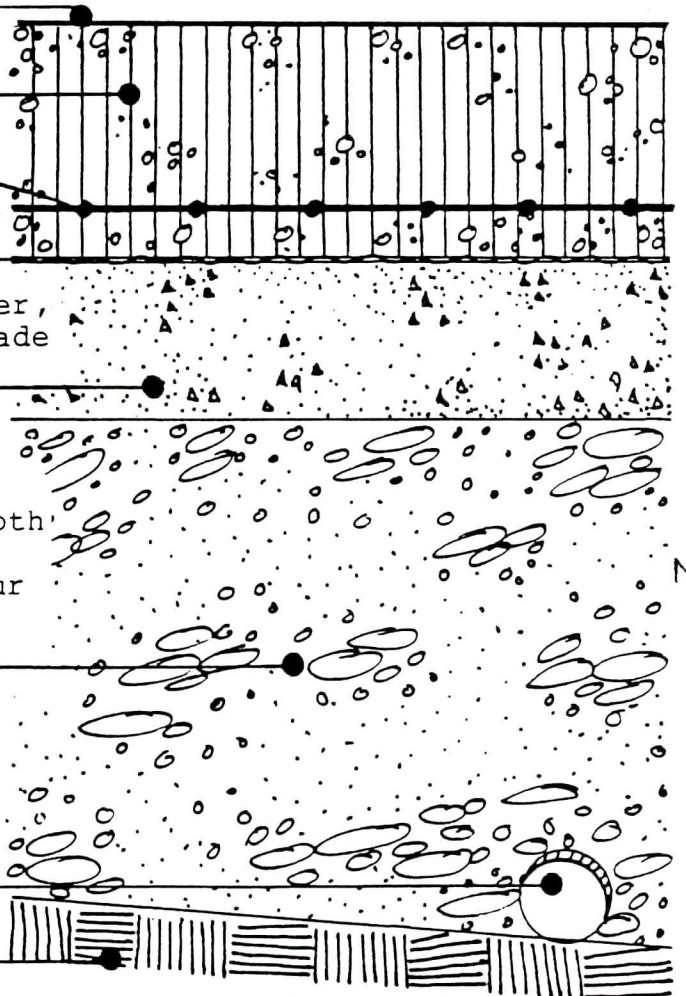

N.T.S.

© 1989 rmz Elastech Products Inc.

a completely integrated system

1. The area for the EverPlay installation must have a water percolation rate of 60 liters/M²/hour or 1.5 US gallons/ft²/hour. Should the rate be less, a french drain must be installed to provide adequate water flow.
2. Any grass or topsoil must be removed from the area. Loosen the surface to a depth of 100 mm (4") with a rototiller.
3. Grade the surface to provide a level surface and compact using a two ton non-vibrating roller. Compact to 95% Proctor.
4. Place to a 50 mm (2") depth, limestone screenings over the compacted aggregate. Level this surface only. This base must not deviate from the final surface by more than 3 mm (1/8") plus/minus over 3 meters (10').
5. Place a filter cloth (Mirafi P50) over the base providing for a 150 mm (6") overlap at all seams.
6. A wire mesh of a minimum 10 x 10 x 10/10 is laid flat on top of the filter cloth. Wire ties are used to join individual pieces of wire mesh.
7. The EverPlay layer 30 mm (1.2") is placed by an authorized installer or Sportbau Canada Limited.
8. The EverPlay surface can be used for a recreational, fitness or play surface, however an authorized installer or Sportbau Canada Limited can apply optional upgraded surfaces at the time of installation or at any time in the future.
9. The EverPlay surface is black, but can be spray coated with a polyurethane spray that comes in a variety of colours.
10. Should the EverPlay be a game surface, lines are applied using a two-component polyurethane paint.

NOTE: Depth of excavation and granular fill will vary depending upon frost conditions and the ability of the sub-soil to absorb water.